
Is Your Product Registered? Contact your Dealer to verify. Warranties are based on Registrations and reduced to 1 year without Registration.

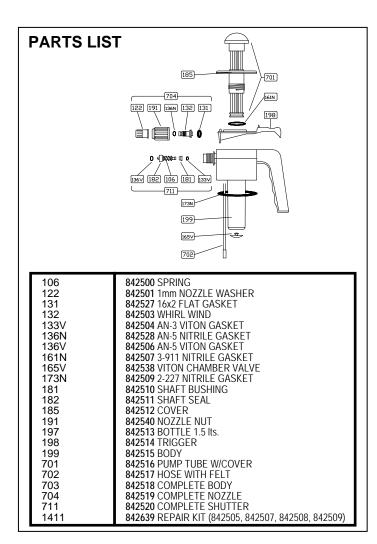

INITIAL SETUP


Unscrew head of bottle. Fill in the tank with material to be sprayed (maximum 1 lt.). Replace the head and tighten firmly. Pump the top knob 20~ 25 strokes. To spray, press the trigger (198) and move the nozzle (122) to obtain the desired spray pattern. Use the yellow lever to lock the trigger on. Over time, pressure will diminish and you will need to pump again.

MAINTENANCE

After use, clean all internal and external components of sprayer. Use liquid detergent and clean water. Rinse with clean water only.

ALWAYS RELEASE PRESSURE AFTER USE AND CLEAN BEFORE STORAGE.

To prevent drying of gaskets, lubricate with oil in area shown in illustration when not in use. Nozzle (122) be can be cleaned of obstructions by a stream of water or a soft cleaning instrument. Use caution not to damage spray orifice.



GENERAL PRECAUTIONS

Work only in well ventilated rooms and with proper protective equipment. Avoid contact with skin and eyes. Refrain from eating, drinking and smoking. Wash hands and face after preparation, as well as when work is completed. Read and be aware of the instructions on chemical labels and manual. Do not spray toward people, animals, and nearby electrical components. In case of ingestion or inhalation, go to the doctor or the nearest hospital and bring the product label.

Never use alkaline, acids, flammable products or combustionenhancing compounds. Sprayers are to be used only with herbicides, insecticides and fungicide for plants. Do not expose to the sunshine. Do not mix chemicals.

MARUYAMA RESERVES THE RIGHT TO CHANGE PRODUCT SPECIFICATIONS WITHOUT NOTICE